




5V

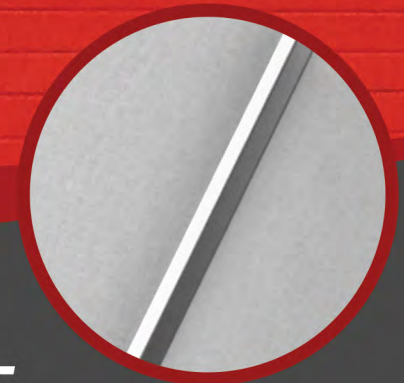

DURABLE, TRADITIONAL, VERSATILE

5V metal panels have long been the top choice for agricultural applications, however it's simplistic beauty and durable design allows it to be applied to a wide variety of residential and commercial projects. 5V is exposed fastened with 24" coverage and 3/8" high ribs. Available in a painted Galvalume AZ-50 substrate and a mill finished Galvalume Plus Az-50 substrate, 5V carries a 25-year warranty that guarantees beauty for decades. As the manufacturer, Mansea Metal will custom cut the panels to your exact specifications, saving you valuable installation time and money. With more than 30 years' experience in the industry, we understand how important your project is and will work with you every "inch" of the way.

www.manseametal.com

www.midwesternbuildings.com

KENTUCKY

925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS

1181 S.R. 121
Mt.Zion, IL 62549
Phone: 217.864.5835
Fax: 217.864.2297

5V



GENERAL INFORMATION

Slope: Minimum recommended roof slope is 3:12.


Coverage: 26" formed width with 24" coverage.

Length: Minimum recommended cut length is 1'-0." Maximum is 30'-0." *Longer panels need special consideration for erection, packaging, and shipping.*


Substructure: Designed for use over a solid substrate. *Uniform and properly aligned substructures are necessary to avoid distortion.*

Gauge: Available in 29 gauge and 26 gauge in Galvalume finish.

Fasteners: Exposed fastened product. Contact your representative for assistance in choosing the proper fastener for your project. See fastening pattern below.

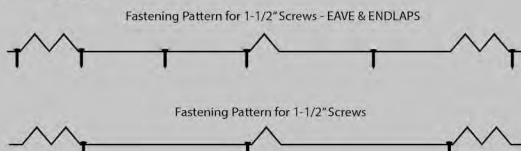

**all panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.*

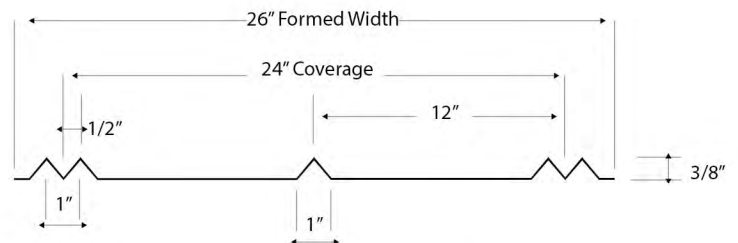

- 24" coverage, 26" formed width
- Can be installed horizontally or vertically
- Painted Galvalume AZ-50 and Mill Finished Galvalume Plus AZ-50 substrate with 25-year warranty
- Perfect choice for agricultural applications or patching
- 3/8" high ribs with 1/2" increments
- Complete line of accessories
- Minimum roof slope - 3:12
- Exposed fastened panel

valspar
WeatherXL



www.manseametal.com

www.midwesternbuildings.com

KENTUCKY
925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS
1181 S.R. 121
Mt. Zion, IL 62549
Phone: 217.864.5835
Fax: 217.864.2297