



HI-RIB



SLEEK, DURABLE, VERSATILE

Ideal for low-sloping roofs, Hi-Rib has all your projects covered. From agricultural to commercial applications, Hi-Rib is manufactured with you in mind. As a 26 gauge product with 36" coverage and a 39" formed width, it can be installed in horizontal or vertical orientation. Hi-Rib is an exposed fastened panel that uses fewer fasteners, allowing for quick installation and added affordability. As the manufacturer, Mansea Metal will custom cut the panels to your exact specifications, saving you valuable installation time and money. With more than 30 years' experience in the industry, we understand how important your project is and will work with you every "inch" of the way.

www.manseametal.com

www.midwesternbuildings.com


KENTUCKY

925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS

1181 S.R. 121
Mt. Zion, IL 62549
Phone: 217.864.5835
Fax: 217.864.2297

HI-RIB

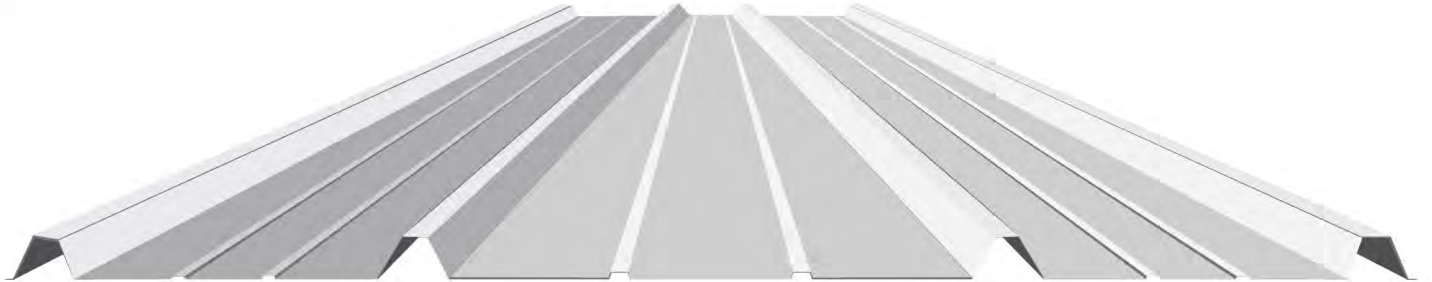

GENERAL INFORMATION

Slope: Minimum recommended slope is 1/2:12.

Coverage: Available in a 1-1/4" rib height with a 36" coverage and 39" formed width.

Length: Minimum cut length is 3'-0". Maximum is 53'-0". *Longer panels need special consideration for erection, packaging, and shipping.*

Substructure: Designed for use over a solid substrate or open structural framing. *Uniform and properly aligned substructures are necessary to avoid panel distortion.*

Gauge: Available in 26 gauge in Galvalume, Valspar WeatherXL colors, and Kynar finishes.

Fasteners: Exposed fastened. Contact your representative for assistance in choosing the proper fastener. See fastening pattern below.


Fastening Pattern - EAVES & ENDLAPS



Fastening Pattern - SUPPORTS



**all panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.*

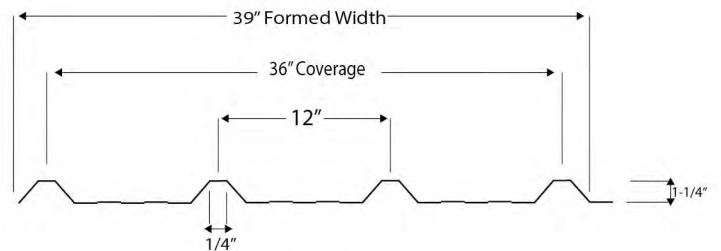

- 36" coverage and 39" formed width
- 1-1/4" rib height with 12" increments
- Painted Galvalume and Mill Finished Galvalume Plus substrate with 25year warranty
- Multiple vibrant Valspar WeatherXL color choices and Kynar finishes with 40-year limited warranty
- Complete line of accessories
- Minimum roof slope - 1/2:12
- Installs over open or solid substrate
- Can be installed horizontally or vertically

valspar
WeatherXL



www.manseametal.com

www.midwesternbuildings.com

KENTUCKY
925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS
1181 S.R. 121
Mt. Zion IL 62549
Phone: 217.864.5835
Fax: 217.864.2297